

Single Point Lubricator



The Compact and Refillable  
Single-Point Lubricator



**INDUSTRIAL LUBRICANTS (UK) LIMITED**

**Tel. 08701 632933 Fax. 08701 632933**

**sales@indlub.co.uk www.indlub.co.uk**

# simalube, the compact lubricator that is economical, universally adaptable, and a friend to our environment.

## Economical lubrication

Using simalube, the lubricant can be applied directly to the lubrication point. The simalube lubricator is activated with a simple twist of the dispensing dial on the top of the lubricator, and can be altered at any time. The lubricant level can always be monitored through the inspection window. simalube is ideal for demanding applications such as lubrication points in difficult to reach locations or within dangerous production zones. simalube is especially well suited for lubrication points which may easily be overlooked or forgotten. These, often critical, lube points are provided a consistent delivery of lubricant reliably and automatically, 24 hours a day for up to one full year. Damages caused by over or under lubrication, and the high costs associated with repairing them, can be minimized with simalube.



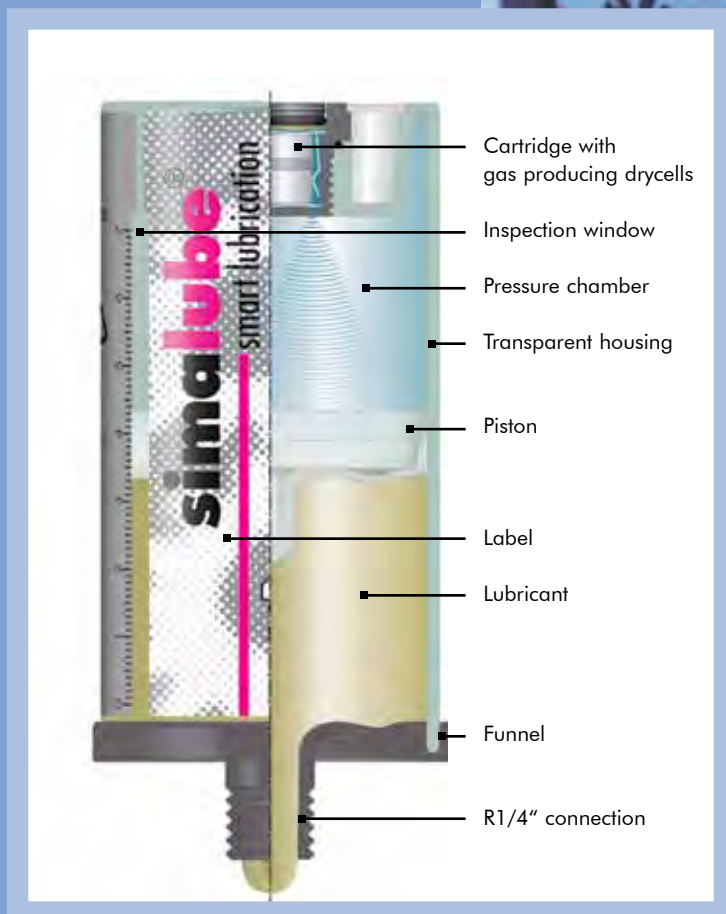
The new generation of simalube lubricators

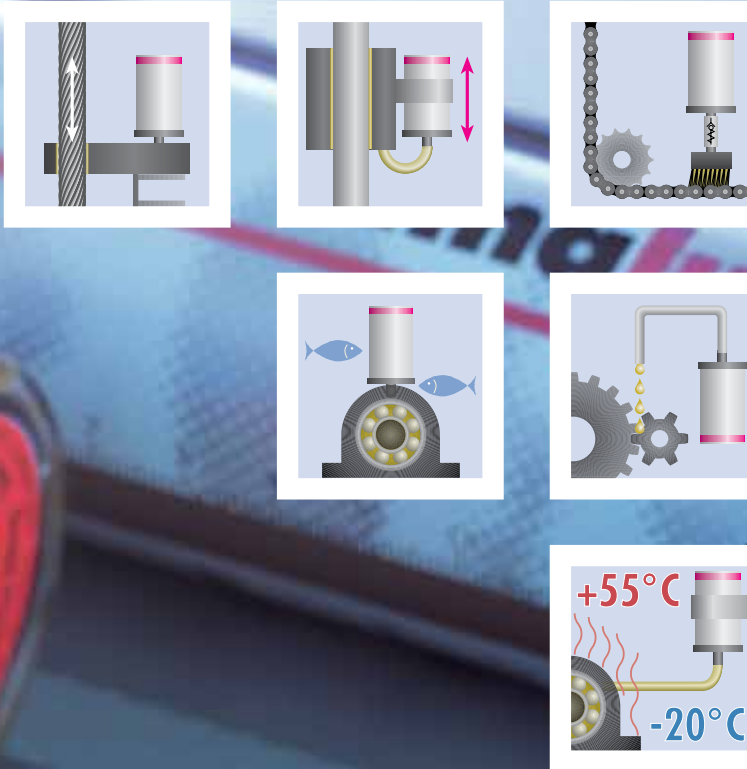


Cartridge with gas producing drycells



The dispensing period is variable and can be easily adjusted (1-12 months)





### Universal application

simalube is available with a wide range of standard greases and oils. Customer specific lubricants can be used if suitable. The dispensing time on the simalube lubricator is variable between one and twelve months. The flexible delivery time gives the end user complete control over the amount of lubricant being applied. simalube delivers lubricant reliably throughout a temperature range of  $-20$  to  $+55^{\circ}\text{C}$  ( $-4$  to  $+131^{\circ}\text{F}$ ). simalube is universally adaptable to most lubrication tasks through the use of the available accessory programme. The simalube complies with the high requirements of the ATEX norms and can be applied in all explosive areas without hesitation.

### Environmentally friendly and refillable

simalube is environmentally friendly as it does not contain any toxic liquids, batteries, motors, or gears. When exhausted, the simalube can either be recycled through standard recycling channels, or fitted with a new gas generating cartridge, easily refilled and put back into service.



simalube can be filled as well as refilled by using a standard barrel pump that is typically used to fill grease guns.





INDUSTRIAL LUBRICANTS (UK)



# INDUSTRIAL LUBRICANTS (UK) LIMITED

Tel. 08701 632933 Fax. 08701 632933

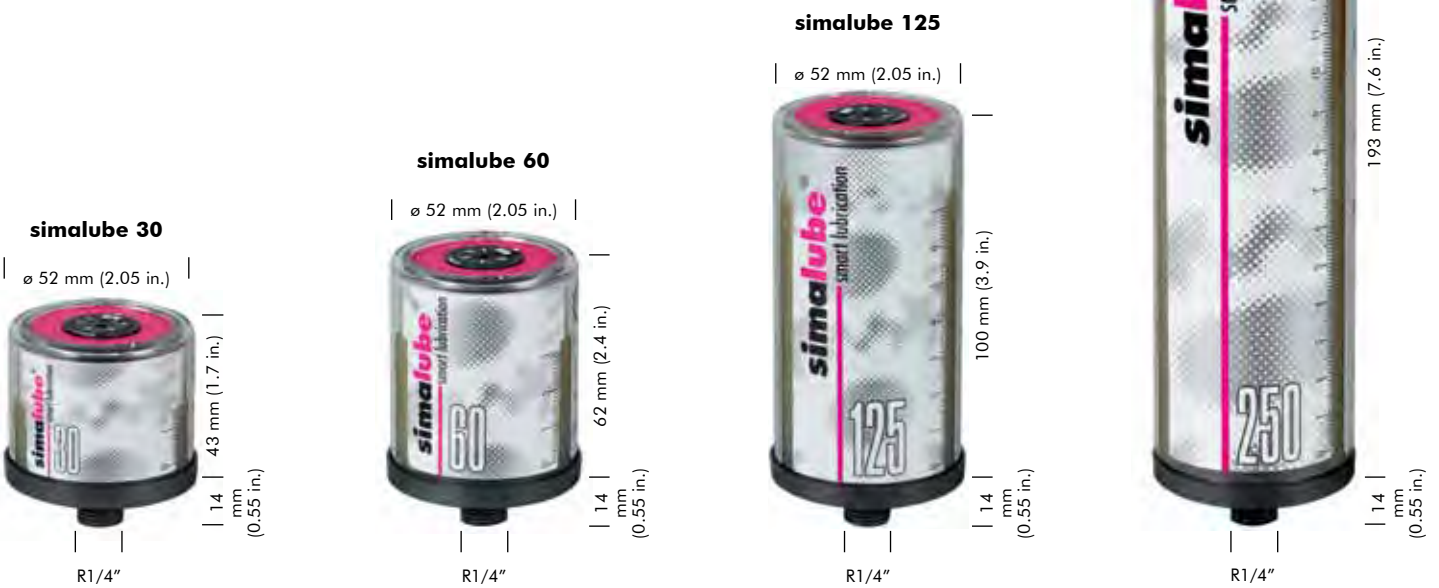
sales@indlub.co.uk www.indlub.co.uk



For further information on products and applications please request a simalube data sheet. You can find a list of simalube distributors at [www.simalube.com](http://www.simalube.com)

## Dimensions and standard lubricants

Standard lubricants					Order Number			
No.	Application	Temperature range [°C]	Base oil	Thickener	Lubricant need			
					30 ml	60 ml	125 ml	250 ml
SL01	Multipurpose grease	- 30 / + 120°C	Mineral oil	Li/Ca	SL01-30	SL01-60	SL01-125	SL01-250
SL02	Multipurp. grease + MoS <sub>2</sub>	- 25 / + 130°C	Mineral oil	Li	SL02-30	SL02-60	SL02-125	SL02-250
SL04	High temperature grease	- 20 / + 160°C	Mineral oil	Be	SL04-30	SL04-60	SL04-125	SL04-250
SL06	Fluid grease	- 40 / + 110°C	Mineral oil	Li/Ca	SL06-30	SL06-60	SL06-125	SL06-250
SL09	Biodegradable grease	- 20 / + 100°C	Ester oil	Li/Ca	SL09-30	SL09-60	SL09-125	SL09-250
SL10	Food industry grease	- 30 / + 140°C	Synthetic	Al	SL10-30	SL10-60	SL10-125	SL10-250
SL14	Chain oil	- 10 / + 90°C	Mineral oil		SL14-30	SL14-60	SL14-125	SL14-250
SL15	High temperature chain oil	0 / + 250°C	Synthetic		SL15-30	SL15-60	SL15-125	SL15-250
SL18	Food industry oil	- 15 / + 150°C	Synthetic		SL18-30	SL18-60	SL18-125	SL18-250
SL24	Wide temp. range grease	- 30 / + 150°C	Mineral oil	Li comp.	SL24-30	SL24-60	SL24-125	SL24-250
SL25	High temperature grease	- 20 / + 180°C	Mineral oil	Polyurea	SL25-30	SL25-60	SL25-125	SL25-250





INDUSTRIAL LUBRICANTS (UK)



# INDUSTRIAL LUBRICANTS (UK) LIMITED

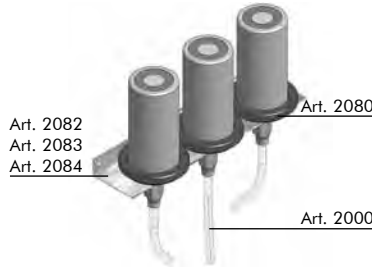
Tel. 08701 632933 Fax. 08701 632933

sales@indlub.co.uk www.indlub.co.uk




A comprehensive simalube accessory programme enables the simple application of simalube, the automatic single point lubricator.

### 3-way bracket




### Mounting support with protective cover for simalube

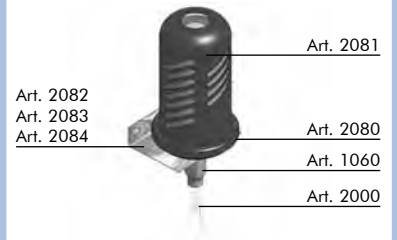


### Adaptor for Perma clamp



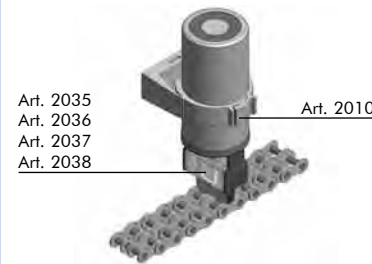
### Chain lubrication with clamp




### Chain lubrication with round brush and two clamps

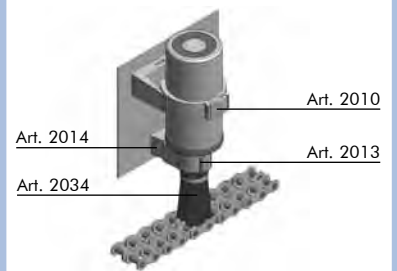


### Chain lubrication with bracket, universally adjustable

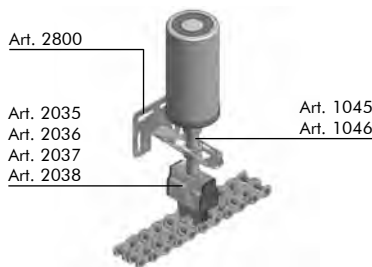


### Chain lubrication with lateral connection



### Lubrication of elevator guides or wire ropes



### Round brush with 90° connection

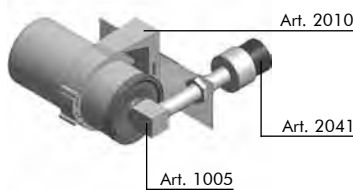

### 4-fold adapter



### WRONG!












Problematic due to different counter pressure!













# INDUSTRIAL LUBRICANTS (UK) LIMITED

Tel. 08701 632933 Fax. 08701 632933

sales@indlub.co.uk www.indlub.co.uk

Description	Art.
 <p><b>Bent connection 45°</b> 1/4"</p> <p>Nickel-plated cast steel</p>	1001
 <p><b>Bent connection 90°</b> 1/4"</p> <p>Nickel-plated cast steel</p>	1002
 <p><b>90°-connection with thread</b> 70 mm, incl. 2 nuts</p> <p>Brass, nickel plated</p>	1005
 <p><b>Connecting nipple 1/4" x</b> 3/8" 1/2"</p> <p>Brass, nickel plated</p>	1010 1011
 <p><b>Reducing nipple 1/4" x</b> 1/8" 1/4" M6 M8 M8x1 M10 M10 x 1 M12 M12x1,5 1/4" (UNF)</p> <p>Brass, nickel plated</p>	1020 1021 1022 1023 1024 1025 1026 1027 1028 1121
 <p><b>Extension</b> 10 mm 35 mm 50 mm</p> <p>Brass, nickel plated</p>	1021 1040 1041
 <p><b>Screwed connection with hole</b> 25 mm, incl. 1 nut 60 mm, incl. 2 nuts</p> <p>Brass, nickel plated</p>	1045 1046
 <p><b>Y-manifold</b> (incl. reducing nipple 1021) 1/4"</p> <p>Brass, nickel plated</p>	1050
 <p><b>Quick connection for hose</b> ø 8 mm (incl. gasket ring 5080) 1/4" female</p> <p>Brass, nickel plated</p>	1060




















Description	Art.
 <p><b>Quick connection</b> for hose ø 8 mm 1/8" male 1/4" male 3/8" male</p> <p>Brass, nickel plated</p>	1070 1071 1072
 <p><b>Hose</b> ø 8/6 mm per meter (Art. and length to be mentioned)</p> <p>Plastic</p>	2000
 <p><b>Clamp</b> for simalube® ø 50 mm</p> <p>Plastic</p>	2010
 <p><b>Adapter</b> for Perma clamp ø 50 mm</p> <p>Plastic</p>	2012
 <p><b>Clamp</b> for round brush ø 28 mm</p> <p>Plastic</p>	2013
 <p><b>Distance holder</b> to clamp for round brush 15 mm</p> <p>Plastic</p>	2014
 <p><b>Mounting support</b> consisting of: - flange - connecting nipple 1/4" - nut</p> <p>Plastic / brass, nickel plated</p>	2080
 <p><b>Protective cover</b> to mounting support 2080</p> <p>Steel, varnished</p>	2081
 <p><b>Bracket</b> 1-way, 3-way, 5-way 75 mm (1 bore) 240 mm (3 bores) 390 mm (5 bores)</p> <p>Steel, burnished</p>	2082 2083 2084
 <p><b>Non-return valve</b> 1/8" 1/4"</p> <p>Brass, nickel plated</p>	2020 2021



# INDUSTRIAL LUBRICANTS (UK) LIMITED

Tel. 08701 632933 Fax. 08701 632933

sales@indlub.co.uk www.indlub.co.uk

Description	Art.	Description	Art.
 <p><b>Round brush</b>, plastic bristles ø 25x45 mm</p> <p>Plastic</p>	2034	 <p><b>4-fold adaptor</b> 1/2" 1/4"</p> <p>Plastic / brass, nickel plated</p>	4100 4101
 <p><b>Round brush</b>, horse bristles ø 25x15 mm</p> <p>Plastic</p>	2041	 <p><b>2-fold adaptor</b> 1/2" 1/4"</p> <p>Plastic / brass, nickel plated</p>	4102 4103
 <p><b>Brush</b>, horse bristles 40 mm 70 mm 100 mm 25 mm</p> <p>Aluminium</p>	2035 2036 2037 2038	 <p><b>Allen key</b> 3 mm (100 pcs.)</p>	4010
 <p><b>Brush, lateral connection</b> horse bristles 40 mm 70 mm 100 mm</p> <p>Aluminium</p>	2035-S 2036-S 2037-S	 <p><b>Cartridge REFILL</b> (Gas generator) 30 ml 60 ml 125 ml 250 ml</p>	5004 5006 5008 5010
 <p><b>Elevator brush</b> horse bristles L x B 151 x 102 mm 113 x 84 mm</p> <p>Plastic</p>	2039 2042	 <p><b>Closing nipple</b> ø 8 mm (100 pcs.)</p> <p>Plastic, green</p>	5050
 <p><b>Bracket</b> universally adjustable</p> <p>Steel, burnished</p>	2800	 <p><b>Non-return valve plug</b> ø 8 mm (100 pcs.)</p> <p>Plastic, yellow</p>	5060
 <p><b>Grease gun</b> with valve pipe</p>	3010	 <p><b>Gasket ring</b></p> <p>Plastic</p>	5080
 <p><b>Connector nipple</b> for cleaning and filling of grease lines 1/4"</p> <p>Brass, nickel plated</p>	3011	 <p><b>Grease cartouche</b> 400 ml, DIN 1284 Multipurpose grease Multipurpose grease with MoS<sub>2</sub> High temperature grease Fluid grease Biodegradable grease Food industry grease Wide temperature range grease High temperature grease</p>	KA01 KA02 KA04 KA06 KA09 KA10 KA24 KA25
 <p><b>Refill nipple</b> for refilling of simalube® 1/4"</p> <p>Brass, nickel plated</p>	3012	 <p><b>Oil bottle, 0.5l</b> Chain oil High temperature chain oil Food industry oil</p>	OF14 OF15 OF18
 <p><b>Connector nipple</b> to grease gun filler for filling simalube® 1/4" 3/8"</p> <p>Plastic</p>	3013 3014		

Subject to change without notice.